



RTD sensor S-07

Salient features & Specifications:


- Suitable for all our OTI & WTI.
- 3 wire, Pt-100 type sensor (IEC-60751, Class B).
- Temperature range : - 50 to 200 °C.
- Mounting :
Male & Female BSP
(Other threads are available on demand).
- Available in duplex style (S-07MD & S-07FD) also.
- Dielectric strength : 2K VAC rms, 50 / 60 Hz for 1 min.

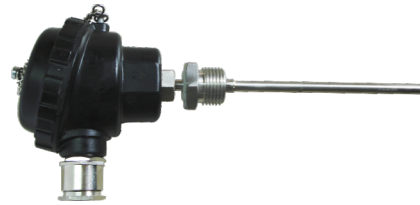

S-07M / S-07MD

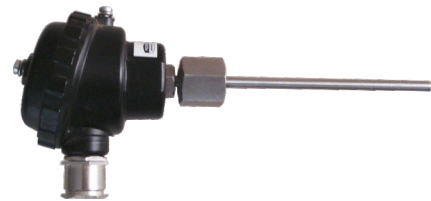


S-07F / S-07FD

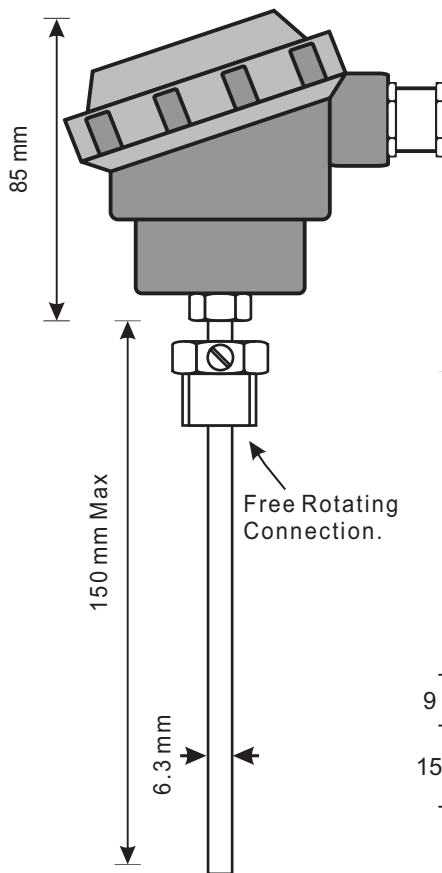


Material :
Head - Cast Aluminum
Weather Proof Head
Tube - SS 304

Terminals




Simplex
S-07M / S-07F



Duplex
S-07MD / S-07MF

Mounting Connection


S-07M / S-07MD

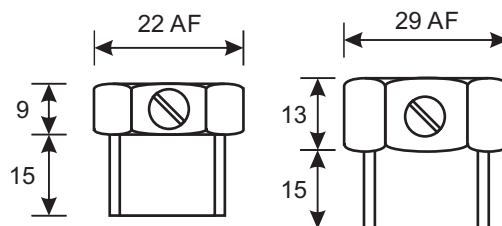

1/2" BSP
Male

3/4" BSP
Male

S-07F / S-07FD



1/2" BSP
Female

All Dimensions are in mm



**Power Electronics
& Control,
Ahmedabad**

Title		Details of RTD sensor type S-07MS & S-07MD.			
Drwn. by	MPM	Drg. No.	16022001		
Chk. by	MBA	Rev. No.	00	Rev. Date	20th Feb, 2016